

Entek - Springer Controls KBU Series Circuit Breakers

Entek



- UL489 Branch Circuit Approved
- KBUH & KBUN series (AC rated)
- KBUD series (DC Rated)
- C & D Trip Curves Available
- ETL Certified
- 6 amp thru 60 amp; 1, 2 & 3 pole



AC Rated; KBUH & KBUN Series

Current (Amps)	1 pole	2 pole	3 pole	1 pole	2 pole	3 pole
AC RATED	C Curve (avg levels of inrush current)			D Curve (high levels of inrush current)		
6 A	KBUH1C06	KBUH2C06	KBUH3C06	KBUH1D06	KBUH2D06	KBUH3D06
10 A	KBUH1C10	KBUH2C10	KBUH3C10	KBUH1D10	KBUH2D10	KBUH3D10
15A	KBUH1C15	KBUH2C15	KBUH3C15	KBUH1D15	KBUH2D15	KBUH3D15
20 A	KBUH1C20	KBUH2C20	KBUH3C20	KBUH1D20	KBUH2D20	KBUH3D20
25 A	KBUH1C25	KBUH2C25	KBUH3C25	KBUH1D25	KBUH2D25	KBUH3D25
30 A	KBUH1C30	KBUH2C30	KBUH3C30	KBUH1D30	KBUH2D30	KBUH3D30
40 A	KBUN1C40	KBUN2C40	KBUN3C40	KBUN1D40	KBUN2D40	KBUN3D40
50 A	KBUN1C50	KBUN2C50	KBUN3C50	KBUN1D50	KBUN2D50	KBUN3D50
60 A	KBUN1C60	KBUN2C60	KBUN3C60	KBUN1D60	KBUN2D60	KBUN3D60

Specifications UL489

TYPE	KBUH	KBUN	KBUD
Standard	UL489		
# Poles	1 2 3	1 2 3	1 2
Rated Operation Voltage (V)	480Y / 277 Vac	240 Vac	60 Vdc 125 Vdc
Rated Frequency (Hz)	50 / 60		
Rated Current (A)	6 - 30	40, 50, 60	6 - 60
Short Circuit Capacity (kA)	10 kA	5 kA	10 kA
Protection Degree	IP20		
Mechanical Life	10,000 cycles		
Terminal Size Acceptability	18 - 2 AWG		
Operating Temperature	-25 to 60 degree (C)		



Springer Controls Co.

PH: 904-225-0575


sales@springercontrols.com

DC Rated; KBUD Series

Current (Amps)	1 pole	2 pole	1 pole	2 pole
DC RATED	C Curve (avg levels of inrush current)		D Curve (high levels of inrush current)	
6 A	KBUD1C06	KBUD2C06	KBUD1D06	KBUD2D06
10 A	KBUD1C10	KBUD2C10	KBUD1D10	KBUD2D10
15A	KBUD1C15	KBUD2C15	KBUD1D15	KBUD2D15
20 A	KBUD1C20	KBUD2C20	KBUD1D20	KBUD2D20
25 A	KBUD1C25	KBUD2C25	KBUD1D25	KBUD2D25
30 A	KBUD1C30	KBUD2C30	KBUD1D30	KBUD2D30
40 A	KBUD1C40	KBUD2C40	KBUD1D40	KBUD2D40
50 A	KBUD1C50	KBUD2C50	KBUD1D50	KBUD2D50
60 A	KBUD1C60	KBUD2C60	KBUD1D60	KBUD2D60



Dimensions - ALL Series (mm) (25.4mm = 1 inch)

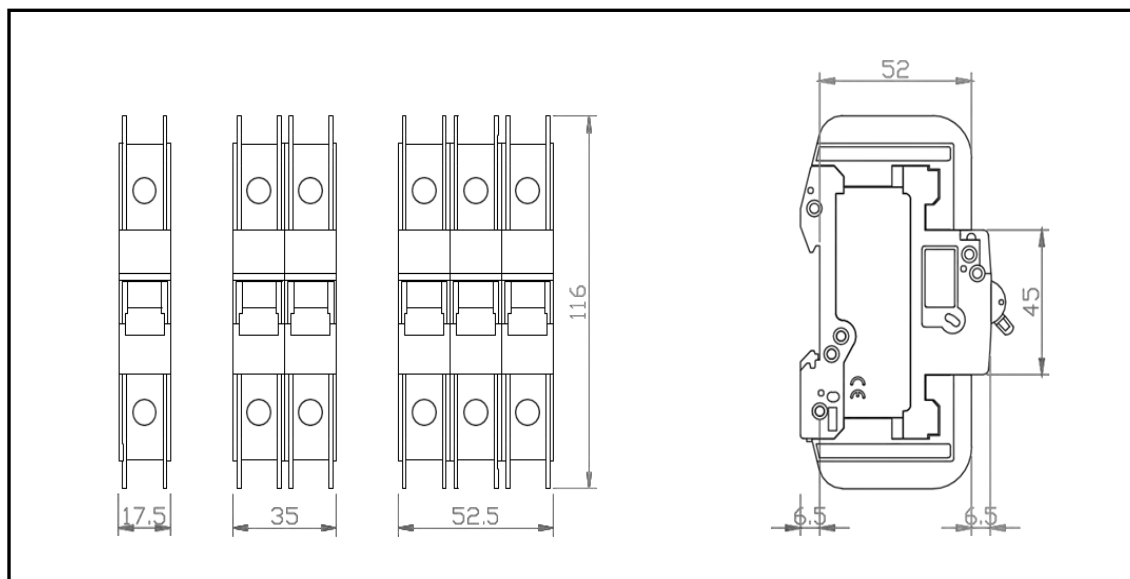

Springer Controls Co.

PH: 904-225-0575

sales@springercontrols.com